

DOG RAMP

Tor

Heavy-Duty Dog Ramp for Truck Beds, 250 lb, 63 or 71 Inches

Dogs up to 250 lb – labs, shepherds, retrievers, danes. The 20-inch deck is the one to pick for a big or unsteady dog.



SPECIFICATIONS

PRODUCT TYPE	Dog Ramp
DIMENSIONS	
LENGTHS	63 in or 71 in
WIDTHS	17 in or 20 in
FOLDED	A quarter of its length, quadruple-fold
STRENGTH	
WEIGHT CAPACITY	250 lb (113 kg)
FRAME	Anodized aluminum, riveted
FEET	Adjustable anti-slip
IN THE BOX	
INCLUDED	Safety tether with steel carabiner
CARRYING	Reinforced webbing handle
ASSEMBLY	None — arrives ready to use

Dimensions are approximate. Natural materials vary slightly from piece to piece.


OPTIONS

SIZE
63" long x 17" wide, 63" long x 20" wide, 71" long x 17" wide, 71" long x 20" wide

KEY FEATURES

- **Rated to 250 lb.** Anodized aluminum, riveted rather than glued, so it doesn't flex underfoot.
- **Tethered to the truck.** A steel carabiner clips to the tailgate latch, so it can't shift on gravel or a slope.
- **Folds four ways.** A 71-inch ramp stores as a flat slab behind the seat.

Dimensions

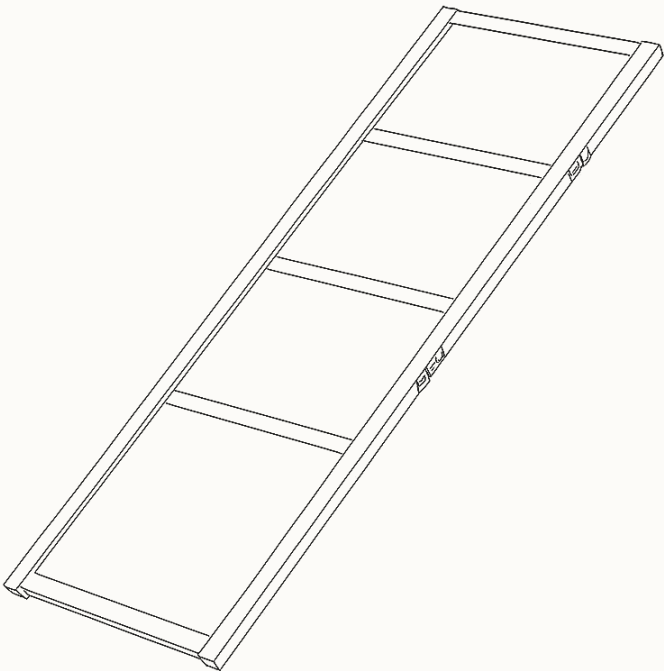

OVERALL VIEW · NOT TO SCALE · DIMENSIONS AS LISTED

MEASUREMENTS

LENGTHS	63 in or 71 in
WIDTHS	17 in or 20 in

VIORN	
ITEM Tor · Dog Ramp	
DRAWING NO. VI-DR-33250-D1	SCALE Not to scale
UNITS in / cm	REVISION A
ISSUED 9 Oct 2026	

Ordering & details

Catalogue numbers are Viorn reference numbers. Quote the catalogue number when ordering or contacting us.

CONFIGURATIONS

SIZE	CATALOGUE NO.
63" long × 17" wide	VI-DR-33250-01
63" long × 20" wide	VI-DR-33250-02
71" long × 17" wide	VI-DR-33250-03
71" long × 20" wide	VI-DR-33250-04

WHO IT FITS

Dogs up to 250 lb — labs, shepherds, retrievers, danes. The 20-inch deck is the one to pick for a big or unsteady dog.

WILL IT FIT?

Measure from the ground to your tailgate or bed floor. The longer the ramp, the gentler the climb - 63 inches suits most SUVs and crossovers, 71 inches is the one for pickup beds and lifted trucks. If your dog is arthritic, size up.

MATERIALS

Anodized aluminum frame, riveted not glued. Ribbed carpet walking surface.

CARE

Hose the carpet down and let it dry. Do not leave standing in water.

WARRANTY & RETURNS

Frames and hardware: 5 years. Covers, foam, fabric and mesh: 1 year. Cover runs from delivery, for the original buyer; chewing, clawing, overloading, misuse and normal wear are not covered. Returns within 30 days of delivery, unused and in original packaging, with no restocking fee. If it arrives damaged or wrong, we pay the return shipping.

Setup & use

GETTING STARTED

1. **Lay it flat.** Open it on the ground indoors or on the drive, flat, nowhere near the truck. Walk him across it for treats until it stops being interesting.
2. **Raise it slowly.** Lift one end a few inches and repeat over two or three days. Let him set the pace rather than coaxing him up a full slope on day one.
3. **Clip the tether.** Set it against the tailgate, clip the carabiner to the latch, and walk beside him the first few times. The tether is what stops it shifting underfoot.

BEFORE YOU START

- ☐ Height measured from the floor to the surface your dog steps onto
- ☐ Floor space for the full length of the ramp, plus room to turn at the bottom
- ☐ A non-slip surface under the foot of the ramp
- ☐ Treats for the first few sessions

PLACEMENT GUIDELINES

ANGLE

The longer the run for a given height, the gentler the slope. Older and arthritic dogs do best on the shallowest angle the space allows.

TOP EDGE

Set the top edge flush with, or just under, the surface it meets, so there is no lip to catch a paw.

TRAINING

Introduce it flat on the floor first, then raise it a little at a time over a few days.

Safety. Do not exceed the listed weight capacity. Check that the ramp is seated and stable before every use, and walk beside your dog until it is confident.

Questions about sizing or setup?

support@viorn.com · +1 (813) 773-3585

9am – 5pm Eastern, seven days. We reply within 12 hours on business days.

Returns. 30 days from delivery, no restocking fee.